

Side Skirting

179 - 181

- 14.1 Side Skirt Rubber
- 14.2 Skirting System

14.1 - Side Skirt rubber

Physical Properties

Color	: Red/Black
Elastomer	: Wear Resistant
Elongation	: 1.23
Hardness	: 45° + / - 5 (Red), 60° + / - 5 (Black)
Abrasion Resistance	: < 120 cm ³

Side Skirting Rubber 40° Shore (Red)

Part No.	Width X Thickness in mm	Length in meter	Unit
3560018010	80 x 10	20	per roll
3560010010	100 x 10	20	per roll
3560012010	120 x 10	20	per roll
3560015010	150 x 10	20	per roll
3560020010	200 x 10	20	per roll




Side Skirting Rubber 60° Shore (Black)

Part No.	Width X Thickness in mm	Length in meter	Unit
3560600080	80 x 10	20	per roll
3560600100	100 x 10	20	per roll
3560600120	120 x 10	20	per roll
3560600150	150 x 10	20	per roll



Side Skirting Rubber with 3 lips

Part No.	Width X Thickness in mm	Length in meter	Unit
3560700150	150 x 20	15	per mtr


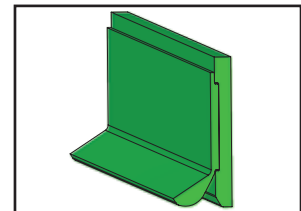


Specialised Skirting Clamps

Part No.	Width in mm	Unit
3550000450	450	per pcs
3550000600	600	per pcs




14.2 - Skirting System

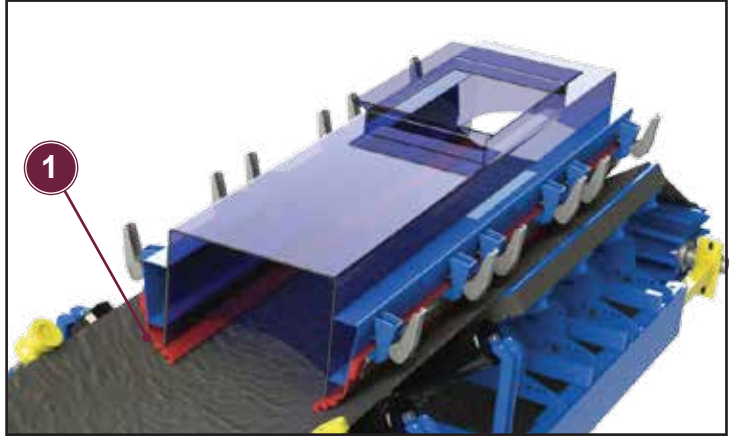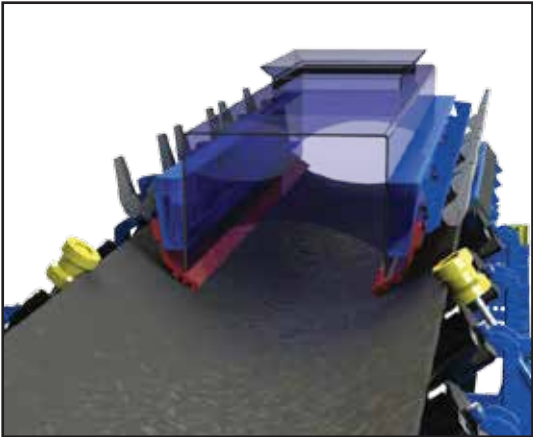

New concept of skirting system offering a perfect seal at loading points. It can be used with or without impact bed underneath the belt. Our special formula skirting will follow the belt deflexion and won't damage the belt, even in the worst conditions.

1

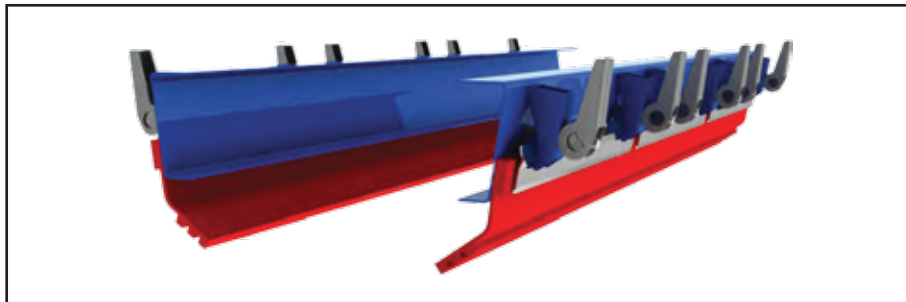

Dimensions

